Glossary


What is a T solution or an HT solution?

T solutions or HT solutions are beacons (rotating or fixed beacons) for flashing light that intermittently light out around their vertical axis (Category T and HT).


Angle of radiation for directional beacons According to category X:



Beacons according to category HT radiate 270° (from 135° left to 135° right) to intermittently light out around its vertical axis.




seen from the front of the vehicle







seen from the rear of the vehicle

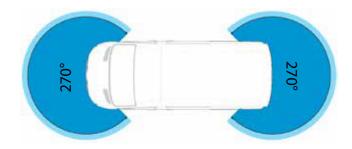

With the Hänsch HT solutions, you can provide the legally required geometric visibility even if the mounting of conventional beacons is not possible due to the structural conditions.

The HT solution, also referred to as a half beacon or semi-continuous bar, can be mounted on the front or rear of the vehicle or can be integrated into the vehicle body.

The various solutions from Hänsch consist of 2 to 6 lamp bodies, providing maximum flexibility in vehicle design. Through the HT solutions Sputnik mini and Sputnik SL the earliest possible warning effect, when mounted at the front of the vehicle, can be ensured e.g. in the crossing area or at exits.

