
SATURN LED

The SATURN LED beacon is available either with flat base or tube mounting options and can thus be used in a wide variety of applications. Powerful LED technology with exceptional warning effect in a solid housing is what sets our SATURN LED beacons apart.

Fix mounting

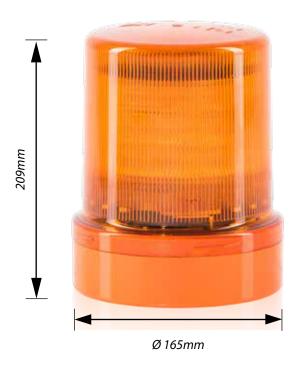

PRODUCT FEATURES:

- Fix mounting in accordance with DIN 14620, form B1
- Function monitoring (low or high)
- Colours: also available in blue and red

Tube mounting



PRODUCT FEATURES:

- For fitting on a mounting tube in accordance with DIN 14620
- Impact-resistant housing base
- Option:
 - Flexible (AF) or fixed tube (A)
- Colours: also available in blue and red

Technical data:	
Designation:	SATURN LED
Voltage:	9-32V multi voltage
Flash frequency:	> 2 Hz
Average power consump- tion:	12 V: 1.5 A / 24 V: 0.75 A
Material:	Lamp dome: PC / socket: ASA
Type of protection:	IP5K4K/IPX9K
Homologation: (Germany and international)	
Light in accordance with ECE-R65:	TA1(E1)00 3000
EMC in accordance with ECE-R 10:	E1)10R-04 5669

